

Overview

The rechargeable batteries are lead-lead dioxide systems. The dilute sulfuric acid electrolyte is absorbed by separators and plates and thus immobilized. Should the battery be accidentally overcharged producing hydrogen and oxygen, special oneway valves allow the gases to escape thus avoiding excessive pressure build-up. Otherwise, the battery is completely sealed and is, therefore, maintenance-free, leak proof and usable in any position.



Battery Construction

Component	Positive plate	Negative plate	Container	Cover	Safety valve	Terminal	Separator	Electrolyte
Raw material	Lead dioxide	Lead	ABS	ABS	Rubber	Copper	Fiberglass	Sulfuric acid


General Features

- Absorbent Glass Mat (AGM) technology for efficient gas recombination of up to 99% and freedom from electrolyte maintenance or water adding.
- Not restricted for air transport-complies with IATA/ICAO Special Provision A67.
- UL-recognized component.
- Computer designed lead, calcium tin alloy grid for high power density.
- Long service life, float or cyclic applications.
- Maintenance-free operation.
- Low self discharge.
- Case and cover available in both standard and flame retardant ABS.

Dimensions and Weight

Length(mm / inch)	171/6.73
Width(mm / inch)	111/4.37
Height(mm / inch)	329/12.96
Total Height(mm / inch)	341/13.4
Approx. Weight(Kg / lbs)	12.5/27.56

* Weight deviation: $\pm 3\%$

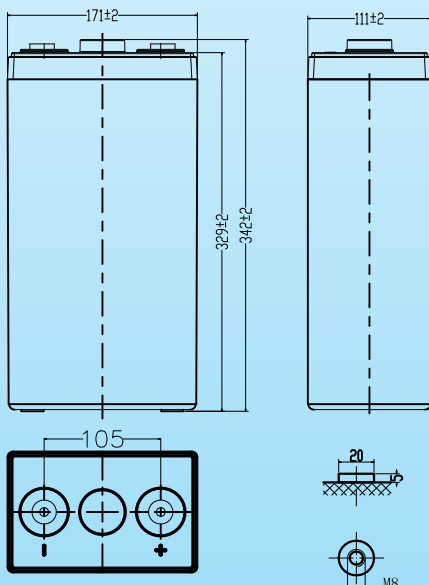

Total height with removeable cover: 364

Battery Specification

Performance Characteristics	
Nominal Voltage	2V
Number of cell	1
Design Life	20 years
Nominal Capacity 77°F(25°C)	
10 hour rate (20.0A, 1.8V)	200Ah
5 hour rate (34.5A, 1.75V)	172.5Ah
1 hour rate (118A, 1.6V)	118Ah
Internal Resistance	
Fully Charged battery 77°F(25°C)	$\leq 0.95\text{mOhms}$
Self-Discharge	
3% of capacity declined per month at 20°C (average)	
Operating Temperature Range	
Discharge	-20~60°C
Charge	-10~60°C
Storage	-20~60°C
Max. Discharge Current 77°F(25°C)	1000A(5s)
Charge Methods: Constant Voltage Charge 77°F(25°C)	
Cycle use	2.40-2.45VPC
Maximum charging current	40A
Temperature compensation	-5.0mV/°C
Standby use	2.20-2.30VPC
Temperature compensation	-3.3mV/°C

Discharge Constant Current (Amperes at 77°F25°C)

End Point Volts/Cell	Time						
	15min	30min	45min	1h	3h	5h	10h
1.60	---	186	154	118	53.8	37.3	21.4
1.65	---	178	147	114	52.1	36.5	21.2
1.70	---	169	141	109	50.3	35.5	20.9
1.75	---	161	134	105	48.3	34.5	20.5
1.80	---	152	127	98.8	46.2	33.3	20.0

Discharge Constant Power (Watts at 77°F25°C)

End Point Volts/Cell	Time						
	15min	30min	45min	1h	2h	3h	5h
1.60	---	361	293	233	139	101	74.1
1.65	---	346	284	223	135	98.8	72.8
1.70	---	331	275	213	130	96.0	71.3
1.75	---	314	266	202	125	93.1	69.8
1.80	---	299	258	191	120	90.0	68.1

(Note)The above characteristics data are average values obtained within three charge/discharge cycles not the minimum values.All data shall be changed without notice,Vision reserves the right to explain and update the information contained hereinto.

